



DEVELOPED FOR **DEMANDING** AND HARSH ENVIRONMENTS

HYGIENIC CERTIFIED COMPONENTS

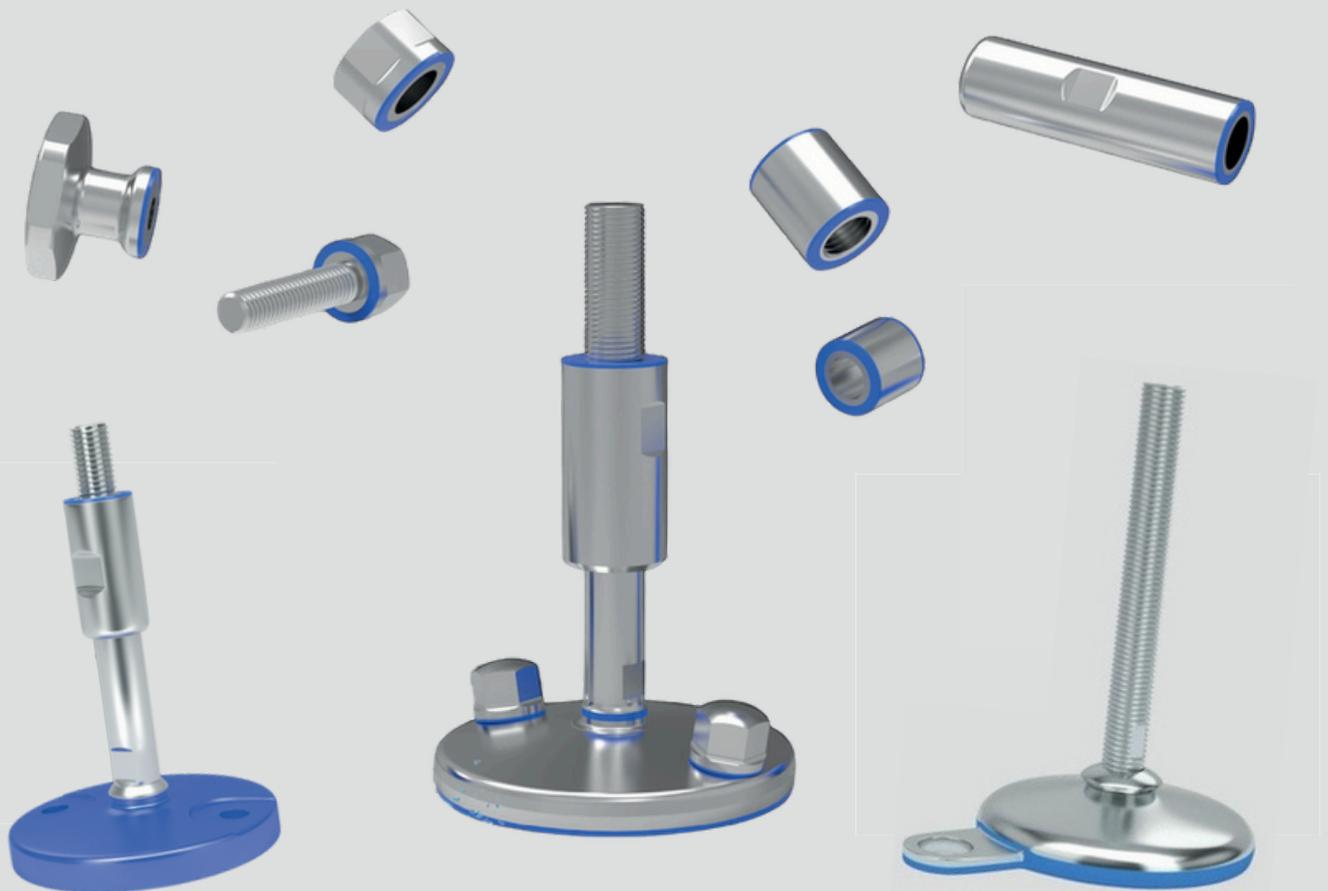


EHEDG-certified and 3A authorised machine levelling feet





The levelling feet certified by EHEDG and authorised by 3-A for sanitary production. Self-draining, fully sealed, and thread-free —for easier cleaning and maximum hygiene.

Machine feet material
Base plate stainless steel 304 (Aisi 1.4301) Spindle stainless steel A2-70 or A4-70 Rubber base NBR Rubber (Nitrile rubber CAS no. 9005-98-5) FDA Certificate according to FDA CFR 21.177.2600 All materials are highly resistant to chemicals and commonly applied cleaning agents and resistant to oils and fats

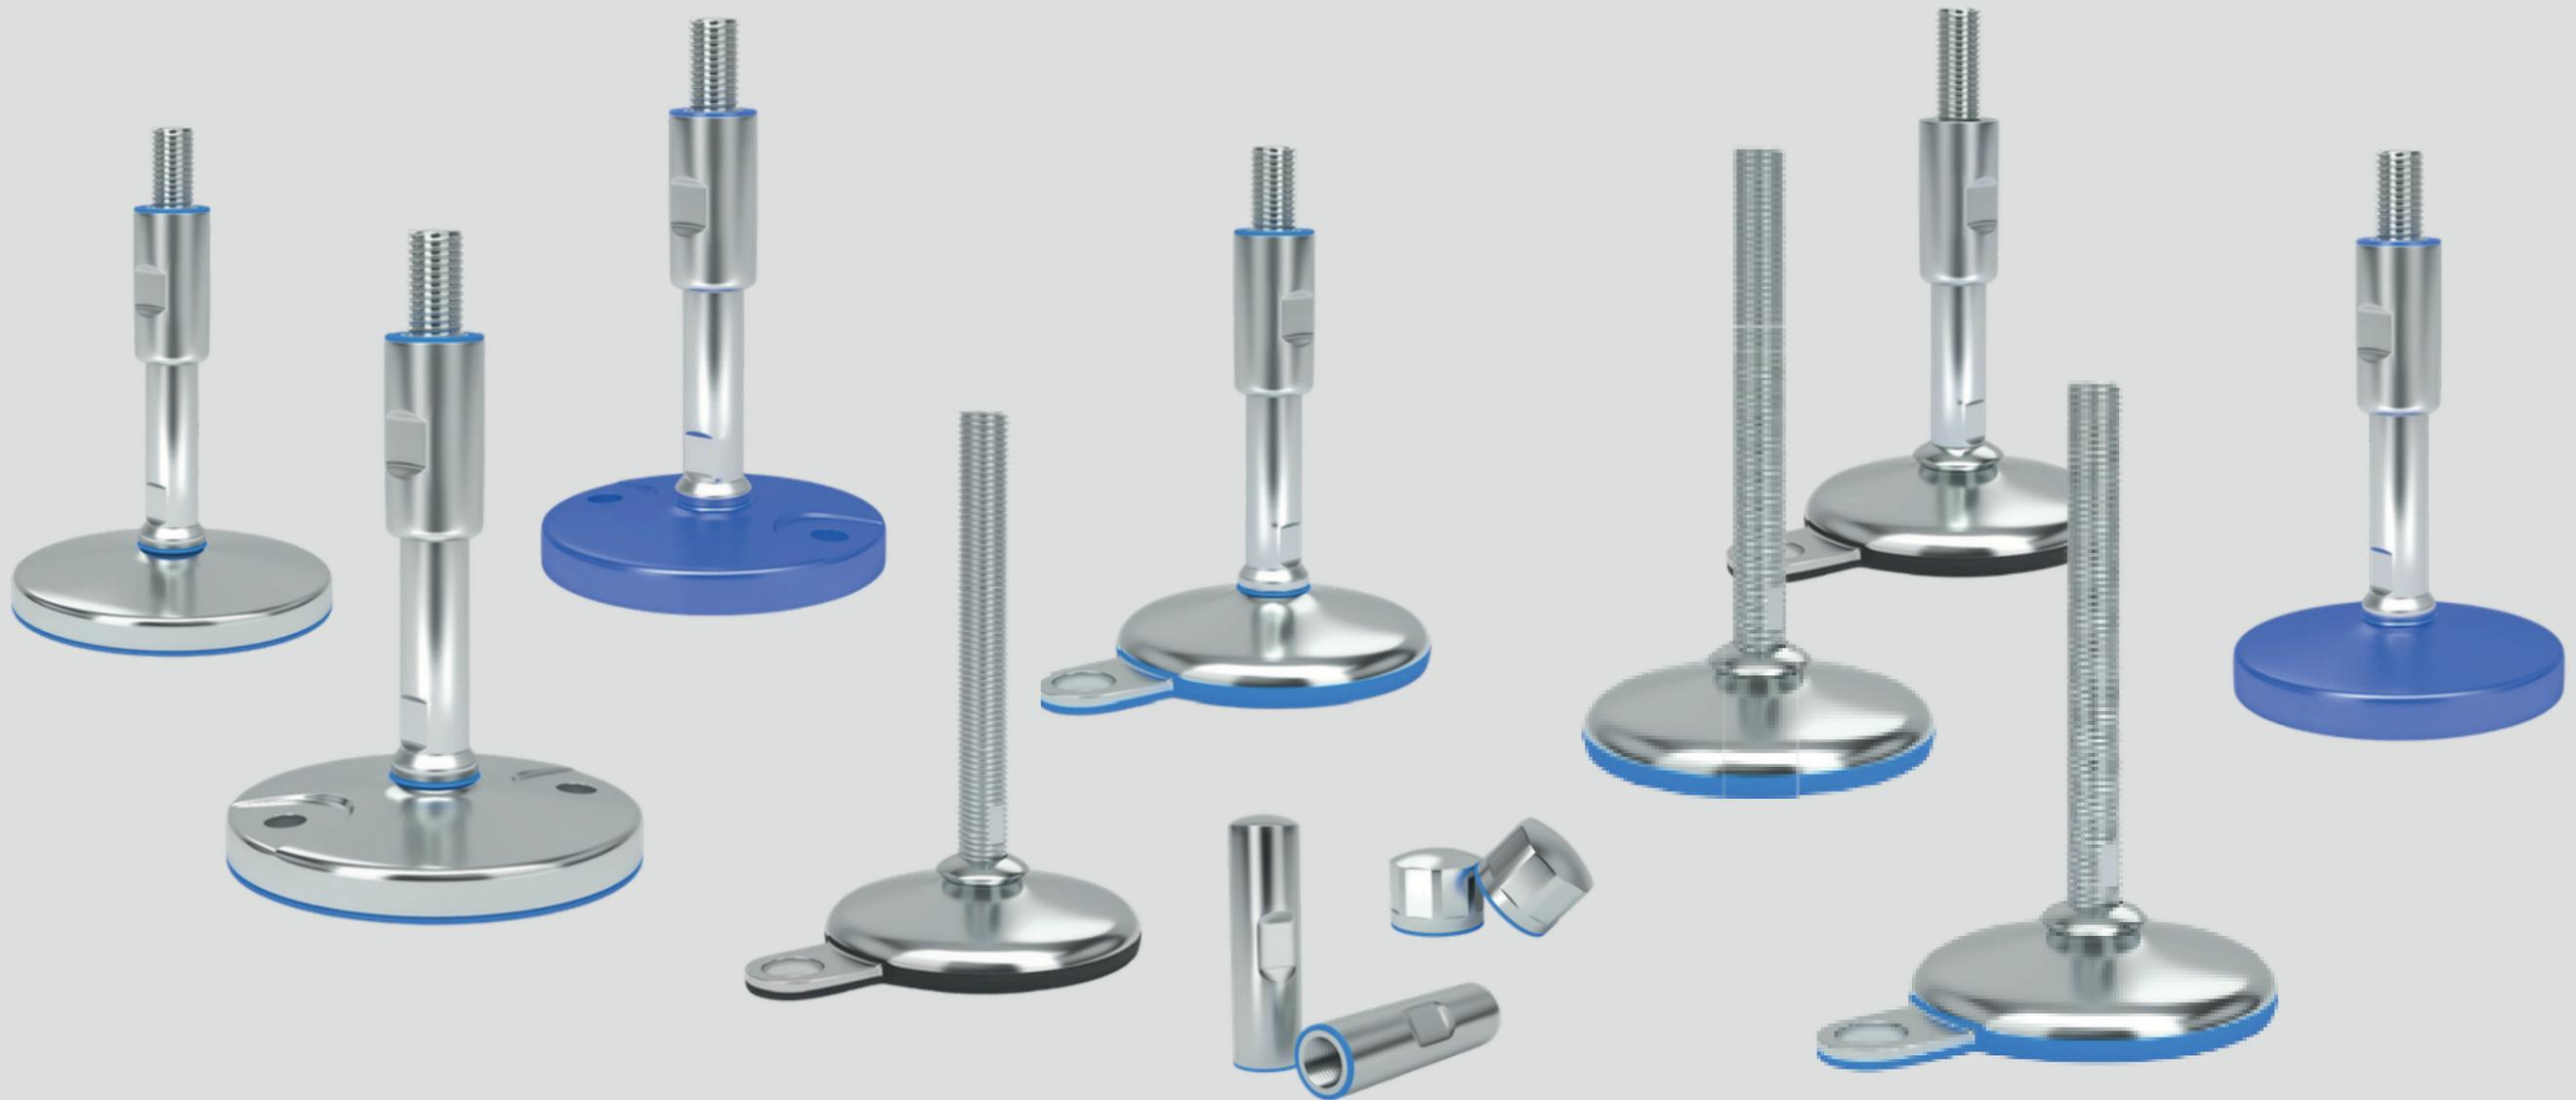

3A/EHEDG Hygienic Stainless solid base feet with sealed spindle

The hygienic stainless solid base feet have a rounded and hygienic design which makes it easy to clean and suitable for demanding sanitary applications. The spindle and base are sealed with silicone gasket. The sleeve is sealed with silicone gasket to the smooth end of the spindle and sealed to the mounting place at the equipment with silicone gasket. The sleeve also functions as a nut.

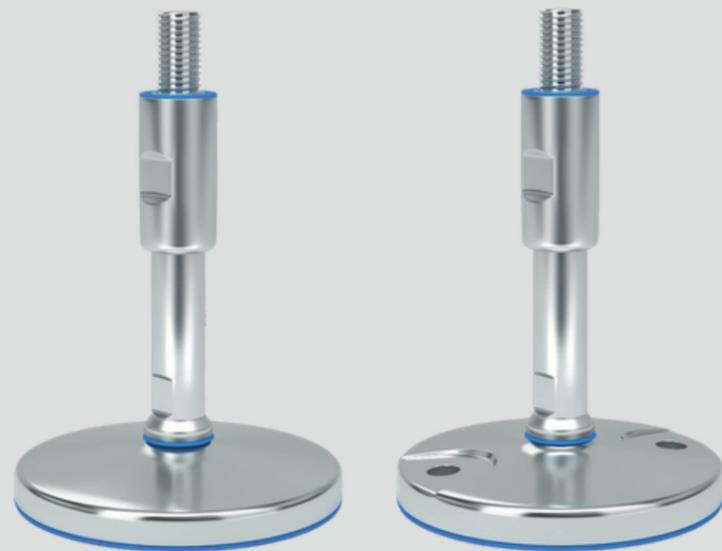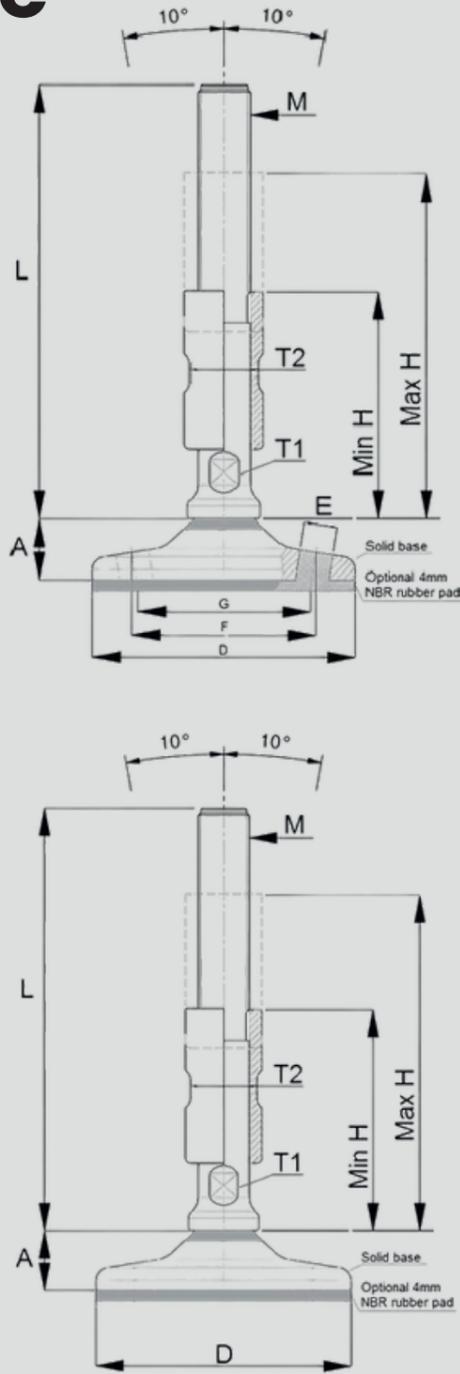

The solid stainless steel 1.4301 base plate is optional included with blue NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber pad. Height of pad 4mm

- HSF 3A base : 3A and FDA certified
- HSFB 3A base: 3A, EHEDG and FDA certified (2 EHEDG bolts (page 18/19) and NBR rubber pad mandatory for full EHEDG certification)

3A/EHEDG Hygienic Stainless solid base feet with sealed spindle



Ordering code : CSF (B) [Diam.base D] + 3A-M [Threads M]x[L]/[H]-(A)
 Example : CSF78 + 3A-M20x135/55-(A)

* **BLUE** - stock/preferred type **GREY** - On request



CSF base*

	CSF 58	CSF 78	CSF 98	CSF 118	CSF 138	CSF 158	CSF 178
Base Diameter D [mm]	58	78	98	118	138	158	178
Base Height A [mm]	22	22	22	22	23	24	25



CSFB Base incl fixation *

	CSFB 78	CSFB 98	CSFB 118	CSFB 138	CSFB 158	CSFB 178
Base Diameter D [mm]	78	98	118	138	158	178
Base Height A [mm]	22	22	22	23	24	25
Lock hole distance G [mm]	58	71.5	85.5	105.5	125.5	145.5
Lock hole diameter E [mm]	8.5	12.5	16.5	16.5	16.5	16.5

3A-Spindle including the sleeve with silicone seals and M10 fixation to base (Type A)



M(thread)

M16	3A-M16x135/55-(A)	3A-M16x175/75-(A)	3A-M16x215/95-(A)	
M20	3A-M20x135/55-(A)	3A-M20x175/75-(A)	3A-M20x215/95-(A)	3A-M20x255/115-(A)
M24		3A-M24x175/75-(A)	3A-M24x215/95-(A)	3A-M24x255/115-(A)
M30			3A-M30x215/95-(A)	3A-M30x255/115-(A)

Adj. Height (Hmin-Hmax)



	3A- Spindle (L)	Sleeve (H)
Adjustable height Min 80 mm – Max 120 mm	L=135 mm	H=55 mm
Adjustable height Min 100 mm – Max 160 mm	L=175 mm	H=75 mm
Adjustable height Min 120 mm – Max 200 mm	L=215 mm	H=95 mm
Adjustable height Min 140 mm – Max 240 mm	L=255 mm	H=115 mm



▪ **Accessories : EHEDG bolt and rubber pad can be found on pages 18/19**

3A/EHEDG Hygienic adjustable solid base feet with sealed spindle

The hygienic adjustable solid base feet have a rounded and hygienic design which makes it easy to clean and suitable for demanding sanitary applications. The spindle and base are sealed with silicone gasket. The sleeve is sealed with silicone gasket to the smooth end of the spindle and sealed to the mounting place at the equipment with silicone gasket. The sleeve also functions as a nut.

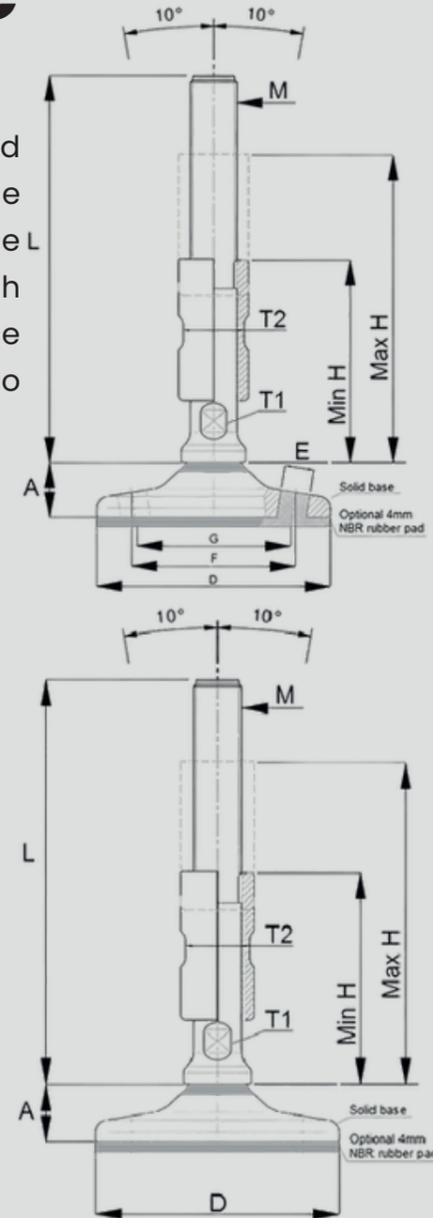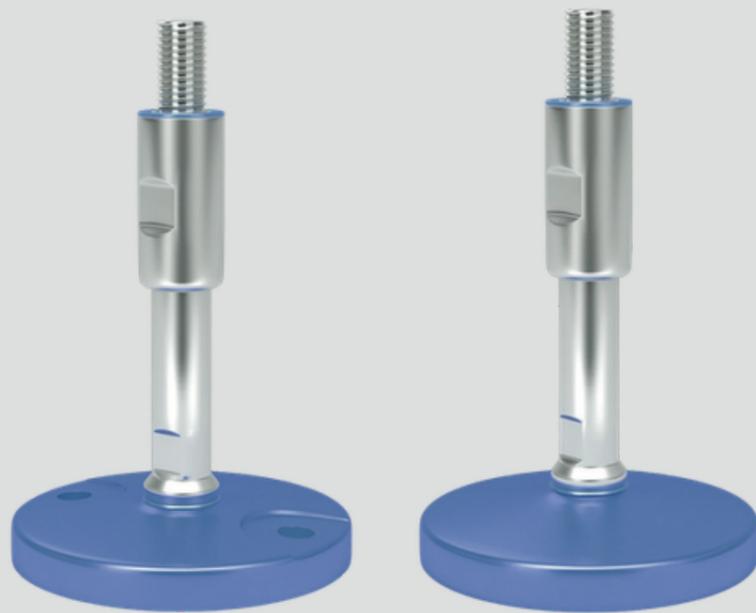

The solid blue anti-bacterial POM base plate optional included blue NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber pad. Rubber pad height 4mm

- HAF base : 3A and FDA certified
- HAFB base: 3A, EHEDG and FDA certified (2 EHEDG bolts (page 18/19) and NBR rubber pad mandatory for full EHEDG certification)

3A/EHEDG Hygienic adjustable solid base feet with sealed spindle



Ordering code: CAF (B) [Diam.baseD]+3A-M[ThreadsM]x[L]/[H]-(A)

Example : CAF78-3A + M20x135/55-(A)

* BLUE - stock/preferred type

GREY - On request



CAF base *	CAF 58	CAF 78	CAF 98	CAF 118	CAF 138
Base Diameter D [mm]	58	78	98	118	138
Base Height A [mm]	22	22	22	22	23



CAFb base with fixation *	CAFb 78	CAFb 98	CAFb 119	CAFb 139
Base Diameter D [mm]	78	98	118	138
Base Height A [mm] Lock	22	22	22	23
hole distance G [mm] Lock	58	71.5	85.5	105.5
hole diameter E [mm]	8.5	12.5	16.5	16.5

3A-Spindle including the sleeve with silicone seals and M10 fixation to base (Type A)



M(thread)

M16	3A-M16x135/55-(A)	3A-M16x175/75-(A)	3A-M16x215/95-(A)	
M20	3A-M20x135/55-(A)	3A-M20x175/75-(A)	3A-M20x215/95-(A)	3A-M20x255/115-(A)
M24		3A-M24x175/75-(A)	3A-M24x215/95-(A)	3A-M24x255/115-(A)
M30			3A-M30x215/95-(A)	3A-M30x255/115-(A)




Adj. Height (Hmin-Hmax)	3A-Spindle (L)	Sleeve (H)
Adjustable height Min 80 mm – Max 120 mm	L=135 mm	H=55 mm
Adjustable height Min 100 mm – Max 160 mm	L=175 mm	H=75 mm
Adjustable height Min 120 mm – Max 200 mm	L=215 mm	H=95 mm
Adjustable height Min 140 mm – Max 240 mm	L=255 mm	H=115 mm

▪ Accessories : EHEDG bolt and rubber pad can be found on pages 18/19

3A Hygienic levelling feet with vulcanized blue rubber base and sealed spindle

The hygienic levelling feet have a rounded and hygienic design which makes it easy to clean and suitable for demanding sanitary applications. The spindle and base are sealed with silicone gasket. The sleeve is sealed with silicone gasket to the smooth end of the spindle and sealed to the mounting place at the equipment with silicone gasket. The sleeve also functions as a nut.

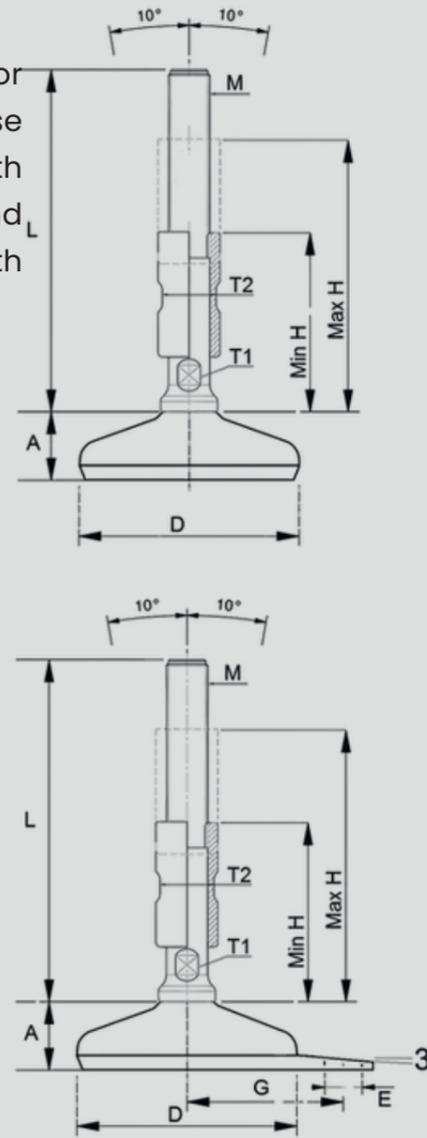

The stainless steel 1.4301 base plate are embedded with blue NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber with unique batch ID number for food safety traceability and comply with 3A regulation.

3A Hygienic levelling feet with vulcanized blue rubber base and sealed spindle



Ordering code : CLF (B)[Diam.baseD]+3A-M[ThreadsM]x[L]/[H]-(B)
Example : CLF 80 + 3A-M20x135/55-(B)

* **BLUE** - stock/preferred type **GREY** - On request



CLF blue base	CLF 50	CLF 60	CLF 80	CLF 100	CLF 120	CLF 140
Base Diameter D [mm]	50	60	80	100	120	140
Base Height A [mm]	25	25	28	32	36	36
Nom. Load [N]	7.000 N	7.000 N	15.000 N	20.000 N	30.000 N	50.000 N



CLFB blue base with 1 fixation	CLFB 60	CLFB 80	CLFB 100	CLFB 120
Base Diameter D [mm]	60	80	100	120
Base Height A [mm]	25	28	32	36
Lock hole distance G [mm]	45.5	55.5	68	81
Lock hole diameter E [mm]	15	15	19	19
Nom. Load [mm]	7.000 N	15.000 N	20.000 N	30.000 N

3A-Spindle including the sleeve with silicone seals and bayonet fitting to base (Type B)




M(thread)	3A-M16x135/55-(B)	3A-M16x175/75-(B)	3A-M16x215/95-(B)	3A-M20x255/115-(B)
M16	3A-M16x135/55-(B)	3A-M16x175/75-(B)	3A-M16x215/95-(B)	3A-M20x255/115-(B)
M20	3A-M20x135/55-(B)	3A-M20x175/75-(B)	3A-M20x215/95-(B)	3A-M24x255/115-(B)
M24	3A-M24x175/75-(B)	3A-M24x215/95-(B)	3A-M30x215/95-(B)	3A-M30x255/115-(B)
M30				



Adj. Height (Hmin-Hmax)	3A Spindle (L)	Sleeve(H)
Adjustable height Min 80 mm – Max 120 mm	L=135 mm	H=55 mm
Adjustable height Min 100 mm – Max 160 mm	L=175 mm	H=75 mm
Adjustable height Min 120 mm – Max 200 mm	L=215 mm	H=95 mm
Adjustable height Min 140 mm – Max 240 mm	L=255 mm	H=115 mm

CLF stainless steel machine feet with full threaded spindle mounting

The hygienic levelling feet have a rounded and hygienic design which makes it easy to clean and suitable for demanding sanitary applications.

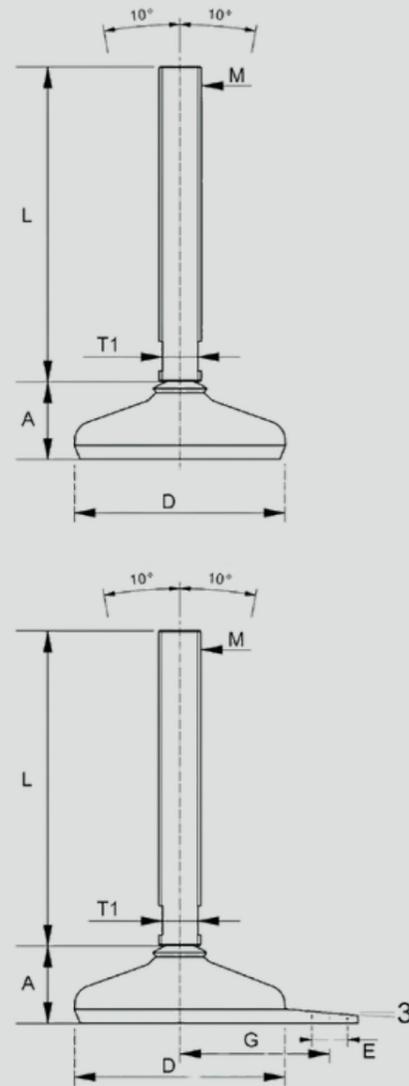

The stainless steel 1.4301 base plate are embedded with blue NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber with unique batch ID number for food safety traceability.

CLF stainless steel machine feet with full threaded spindle mounting



Orderingcode: CLF [Diam.base D] + HM [Thread M] x [L] - (B)
Example: CLF 80 + HM16x100 (B)

* **BLUE** - stock/preferred type **GREY** - On request



CLF blue base	CLF 50	CLF 60	CLF 80	CLF 100	CLF 120	CLF 140
Base Diameter D [mm]	50	60	80	100	120	140
Base Height A [mm]	25	25	28	32	36	36
Nom. Load [N]	7.000 N	7.000 N	15.000 N	20.000 N	30.000 N	50.000 N



CLFB blue base with 1 fixation	CLFB 60	CLFB 80	CLFB 100	CLFB 120
Base Diameter D Base [mm]	60	80	100	120
Height A [mm]	25	28	32	36
Lock hole distance G [mm]	45.5	55.5	68	81
Lock hole diameter E [mm]	15	15	19	19
Nom. Load [N]	7.000 N	15.000 N	20.000 N	30.000 N




HM A2-70 Spindle length (L): Type B - (Bayonet)

- M12 : 70mm, 100mm, 120mm, 150 mm, 180 mm
- M16 : 70mm, 100mm, 120mm, 150mm, 180mm, 200mm
- M20 : 70 mm, 100 mm, 120mm, 150mm, 180mm, 200mm
- M24 : 70 mm, 100 mm, 120 mm, 150mm, 180 mm, 200mm
- M30 : 70 mm, 100 mm, 120 mm, 150mm, 180 mm, 200mm

CLF EH stainless steel machine feet with protected spindle

The spindle is smooth at the end towards the base and the sleeve covers the thread. These features ensure easy cleaning and protect the threads. The sleeve functions as a nut.

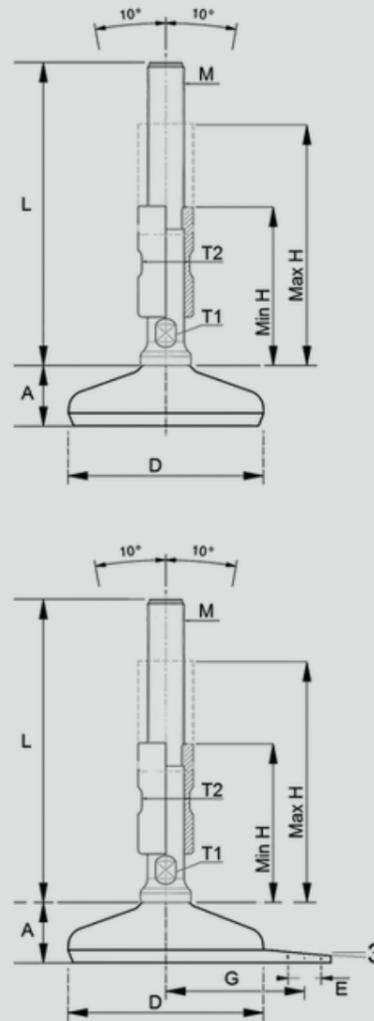

The stainless steel 1.4301 base plate are embedded with blue NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber with unique batch ID number for food safety traceability.

CLF EH stainless steel machine feet with protected spindle



Ordering code: **CLF(B)[Diam.baseD]+EHM[ThreadM]x[L]-(B)**
 Example : CLF 80 + EHM16 x100 - (B)

* **BLUE** - stock/preferred type **GREY** - On request



CLF blue base	CLF 50	CLF 60	CLF 80	CLF 100	CLF 120	CLF 140
Base Diameter D [mm]	50	60	80	100	120	140
Base Height A [mm]	25	25	28	32	36	36
Nom. Load [N]	7.000 N	7.000 N	15.000 N	20.000 N	30.000 N	50.000 N



CLF blue base 1 with fixation	CLFB 60	CLFB 80	CLFB 100	CLFB 120
Base Diameter D [mm]	60	80	100	120
Base Height A [mm]	25	28	32	36
Lock hole distance G [mm]	45.5	55.5	68	81
Lock hole diameter E [mm]	15	15	19	19
Nom. Load [N]	7.000 N	15.000 N	20.000 N	30.000 N

Spindle including the sleeve and bayonet fitting to base (Type EH) - Type B (bayonet)




M(thread)	EH-M16x135/55 (B)		EH-M16x175/75 (B)		EH-M16x215/95 (B)	
M16	EH-M16x135/55 (B)		EH-M16x175/75 (B)		EH-M16x215/95 (B)	
M20	EH-M20x135/55 (B)		EH-M20x175/75 (B)		EH-M20x215/95 (B)	
M24	EH-M24x175/75 (B)		EH-M24x215/95 (B)		EH-M24x255/115 (B)	
M30	EH-M30x215/95 (B)		EH-M30x255/115 (B)			



Adj. Height (Hmin-Hmax)	EH Spindle (L)	Sleeve (H)
Adjustable height Min 80 mm – Max 120 mm	L=135 mm	H=55 mm
Adjustable height Min 100 mm – Max 160 mm	L=175 mm	H=75 mm
Adjustable height Min 120 mm – Max 200 mm	L=215 mm	H=95 mm
Adjustable height Min 140 mm – Max 240 mm	L=255 mm	H=115 mm

HS stainless steel machine feet with full threaded spindle mounting

The hygienic machine feet have a rounded and hygienic design which makes it easy to clean and suitable for demanding sanitary applications.

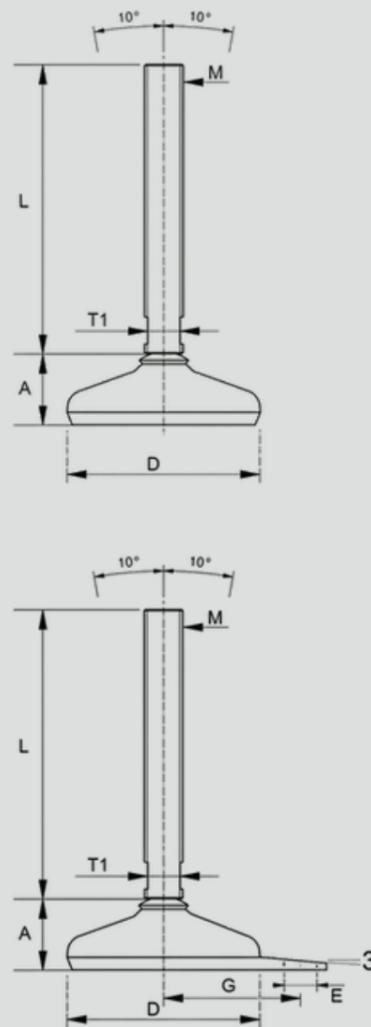

The stainless steel 1.4301 base plate is embedded with black NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber with unique batch ID number for food safety traceability.

HS stainless steel machine feet with full threaded spindle mounting



Ordering code: **HS(B) [Diam.base D] + H[Threads M]x[L] - (B)**
 Example : HS 80 + HM16x150 (B)

* **BLUE** - stock/preferred type

GREY - On request



HS black base	HS 50	HS 60	HS 80	HS 100	HS 120	HS 140
Base Diameter D [mm]	50	60	80	100	120	140
Base Height A [mm]	25	25	28	32	36	36
Nom. Load [N]	7.000 N	7.000 N	15.000 N	20.000 N	30.000 N	50.000 N



HSB black base with 1 fixation	HSB 60	HSB 80	HSB 100	HSB 120
Base Diameter D [mm]	60	80	100	120
Base Height A [mm]	25	28	32	36
Lock hole distance G [mm]	45.5	55.5	68	81
Lock hole diameter E [mm]	15	15	19	19
Nom. Load [N]	7.000 N	15.000 N	20.000 N	30.000 N



HM A2-70 Spindle length (L): Type B (Bayonet)


- M12** : 70mm, 100mm, 120mm, 150 mm
- M16** : 70mm, 100mm, 120mm, 150mm, 180mm, 200mm, 230 mm, 280 mm
- M20** : 120mm, 150mm, 180mm, 200mm, 230 mm, 280 mm, 330 mm
- M24** : 120 mm, 150mm, 180 mm, 200mm, 230 mm, 280 mm, 330 mm
- M30** : 180mm, 200mm, 230 mm, 280 mm, 330 mm

HS EH stainless steel machine feet with protected spindle

The spindles are smooth at the end towards the base and the sleeve covers the thread. These features ensure easy cleaning and protect the threads. The sleeve functions as a nut.



The stainless steel 1.4301 base plate is embedded with black NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber with unique batch ID number for food safety traceability.

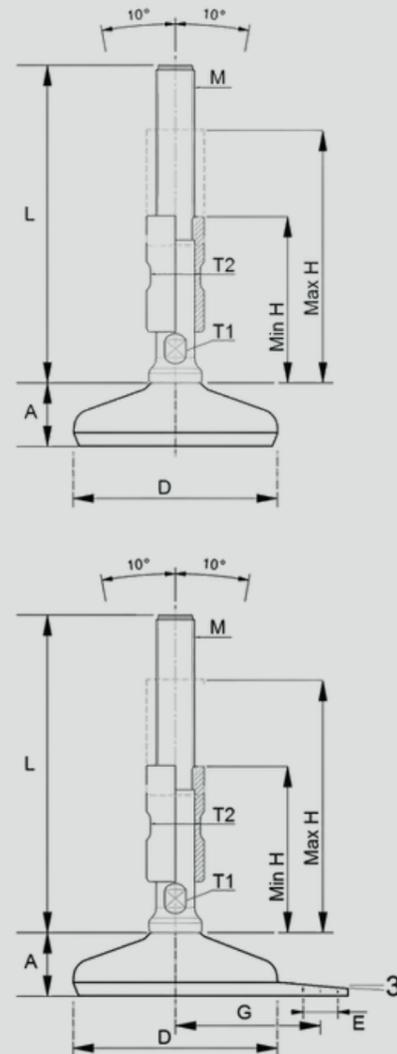

HS EH stainless steel machine feet with protected spindle



Ordering code: HS(B) [Diam.base D] + EH[Threads M]x[L]/[H]-(B)
 Example : HS 80 + EHM16x 40/55 - (B) including sleeve

* **BLUE** - stock/preferred type **GREY** - On request



HS black base	HS 50	HS 60	HS 80	HS 100	HS 120	HS 140
Base Diameter D [mm]	50	60	80	100	120	140
Base Height A [mm]	25	25	28	32	36	36
Nom. Load [N]	7.000 N	7.000 N	15.000 N	20.000 N	30.000 N	50.000 N



HSB black base with 1 fixation	HSB 60	HSB 80	HSB 100	HSB 120
Base Diameter D [mm]	60	80	100	120
Base Height A [mm]	25	28	32	36
Lock hole distance G [mm]	45.5	55.5	68	81
Lock hole diameter E [mm]	15	15	19	19
Nom. Load [N]	7.000 N	15.000 N	20.000 N	30.000 N

Spindle including the sleeve and bayonet fitting to base (Type B)



M(thread)	EH-M16x135/55 (B)	EH-M16x175/75 (B)	EH-M16x215/95 (B)	EH-M20x255/115 (B)
M16	EH-M16x135/55 (B)	EH-M16x175/75 (B)	EH-M16x215/95 (B)	EH-M20x255/115 (B)
M20	EH-M20x135/55 (B)	EH-M20x175/75 (B)	EH-M20x215/95 (B)	EH-M24x255/115 (B)
M24		EH-M24x175/75 (B)	EH-M24x215/95 (B)	EH-M30x255/115 (B)
M30			EH-M30x215/95 (B)	EH-M30x255/115 (B)



Adj. Height (Hmin-Hmax)	EHM Spindle (L)	Sleeve length (H)
Adjustable height Min 80 mm – Max 120 mm	L=135 mm	H=55 mm
Adjustable height Min 100 mm – Max 160 mm	L=175 mm	H=75 mm
Adjustable height Min 120 mm – Max 200 mm	L=215 mm	H=95 mm
Adjustable height Min 140 mm – Max 240 mm	L=255 mm	H=115 mm

EHEDG 3A Hygienic spindle top cover in stainless steel

The hygienic spindle top cover which also meets sanitary standards, ensuring it aligns with global industry requirements. The smooth surface design prevents the buildup of bacteria and contaminants, while its durability ensures long-lasting performance in high-pressure cleaning environments. Self-draining surfaces with a maximal roughness of 0.8 µm Ra.

* **BLUE** - stock/preferred type

GREY - On request

3A Hygienic spindle top cover

Spindle top cover 3A M12-L50

Spindle top cover 3A M12-L70

Spindle top cover 3A M12-L90

Spindle top cover 3A M12-L110

Spindle top cover 3A M16-L50

Spindle top cover 3A M16-L70

Spindle top cover 3A M16-L90

Spindle top cover 3A M16-L110

Spindle top cover 3A M20-L50

Spindle top cover 3A M20-L70

Spindle top cover 3A M20-L90

Spindle top cover 3A M20-L110

Spindle top cover 3A M24-L50

Spindle top cover 3A M24-L70

Spindle top cover 3A M24-L90

Spindle top cover 3A M24-L110

Spindle top cover 3A M30-L50

Spindle top cover 3A M30-L70

Spindle top cover 3A M30-L90


Spindle top cover 3A M30-L110

Spindle top cover 3A M36-L50

Spindle top cover 3A M36-L70

Spindle top cover 3A M36-L90

Spindle top cover 3A M36-L110

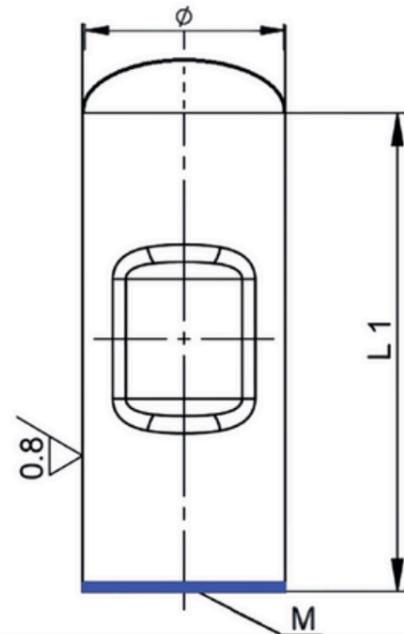

EHEDG 3A Hygienic nut in stainless steel Aisi 1.4301

The hygienic nuts with blue sealing. The seal blocks out water and bacteria and also prevents a non-hygienic metal-to-metal assembly. The nuts have self-draining surfaces with a maximal roughness of 0.8 µm Ra. The design of the nuts does not deviate from the sizes of current standard nuts. Therefore, wrench sizes, thread heights etc. all remains the same making it very easy to upgrade and replace standard nuts. This is the right choice of nuts to be used on all machinery in all certified hygienic wash-down environments.

* **BLUE** - stock/preferred type

GREY - On request

3A Hygienic nut in Aisi 1.4301

3A HN M5-L12 Ø12

3A HN M5-L18 Ø12

3A HN M6-L12 Ø12

3A HN M6-L18 Ø12

3A HN M8-L14 Ø15

3A HN M8-L21 Ø15

3A HN M10-L16 Ø18

3A HN M10-L24 Ø18

3A HN M12-L18 Ø22

3A HN M12-L27 Ø22

3A HN M16-L20 Ø28

3A HN M16-L30 Ø28

3A HN M16-L20 Ø32


3A HN M16-L30 Ø32

3A HN M24-L24 Ø40

3A HN M24-L36 Ø40

3A HN M30-L26 Ø46

3A HN M30-L39 Ø46

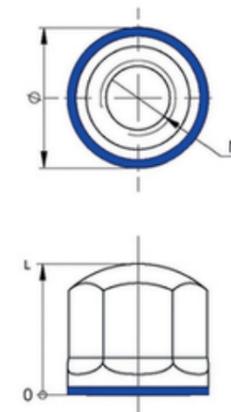

NBR rubber pad - anti slip for feet CAF(B) and CSF(B)

Diameter	Type
58	RBP 58
78	RBP 78
98	RBP 98
118	RBP 118
138	RBP 138
158	RBP 158
178	RBP 178



 **CALDIC** Techniek

Caldic Techniek B.V.
Schuttevaerweg 60 3044 BB
Rotterdam +31 (0)10 415 66 22
atverkoop@caldic-techniek.nl
www.caldic-techniek.nl