


STAINLESS STEEL FEET WITH FULL THREADED SPINDLE

HYGIENIC CERTIFIED COMPONENTS




EHEDG-certified and 3A authorised machine levelling feet range

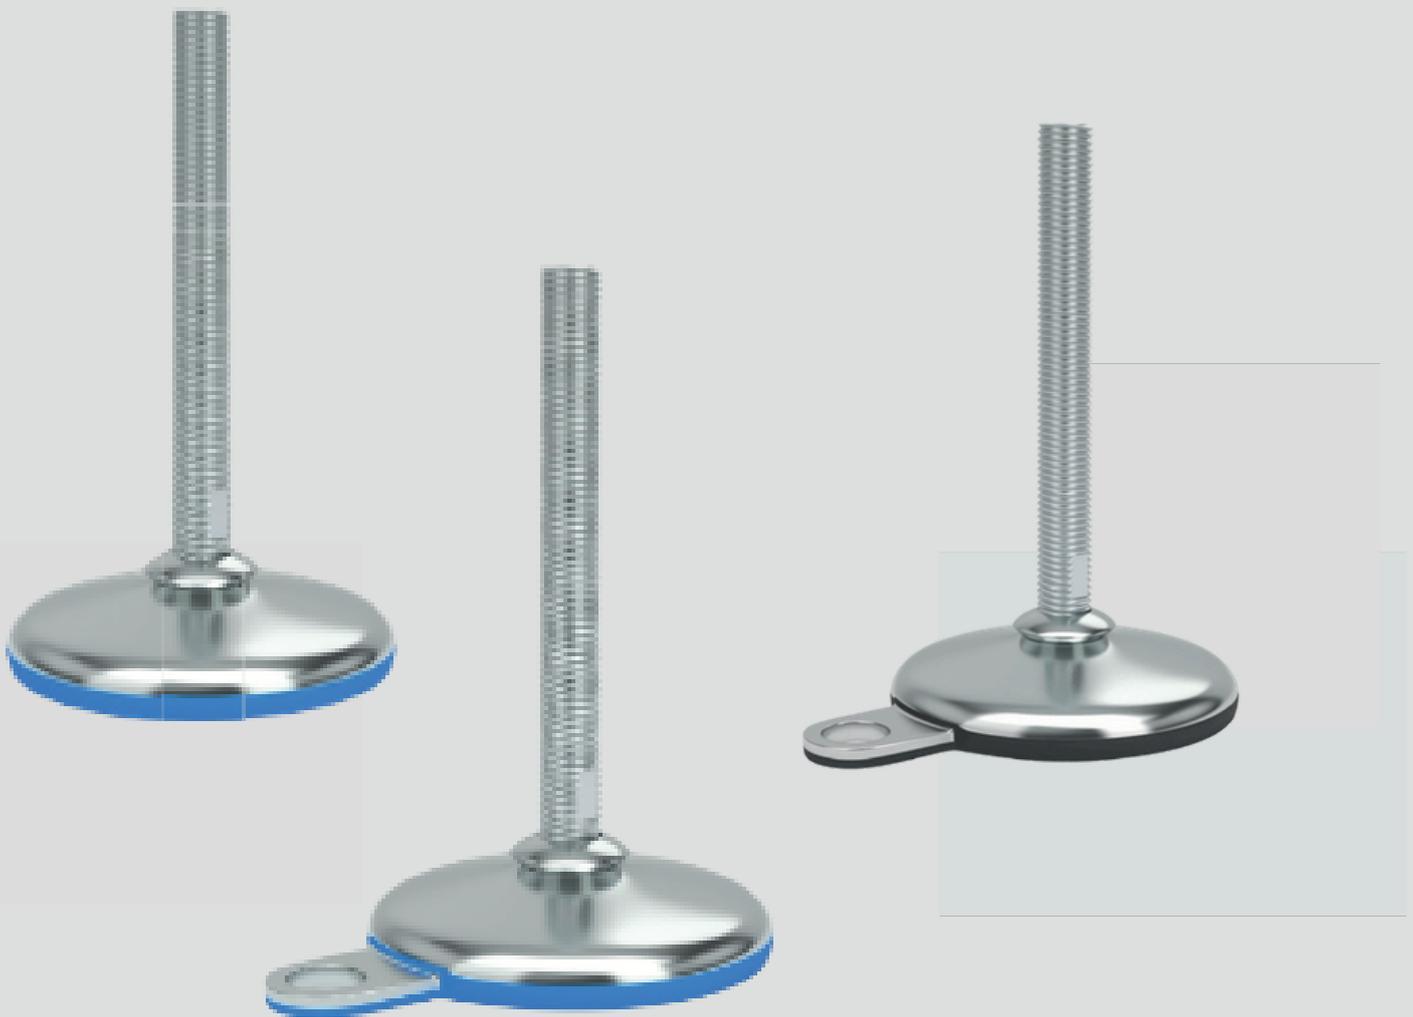

The levelling feet certified by EHEDG and authorised by 3-A for sanitary production. Self-draining, fully sealed, and thread-free —for easier cleaning and maximum hygiene.


Machine feet material

Base plate stainless steel 304 (Aisi 1.4301) Spindle stainless steel A2-70 or A4-70 Rubber base NBR Rubber (Nitrile rubber CAS no. 9005-98-5) FDA Certificate according to FDA CFR 21 177 2600 All materials are highly resistant to chemicals and commonly applied cleaning agents and resistant to oils and fats

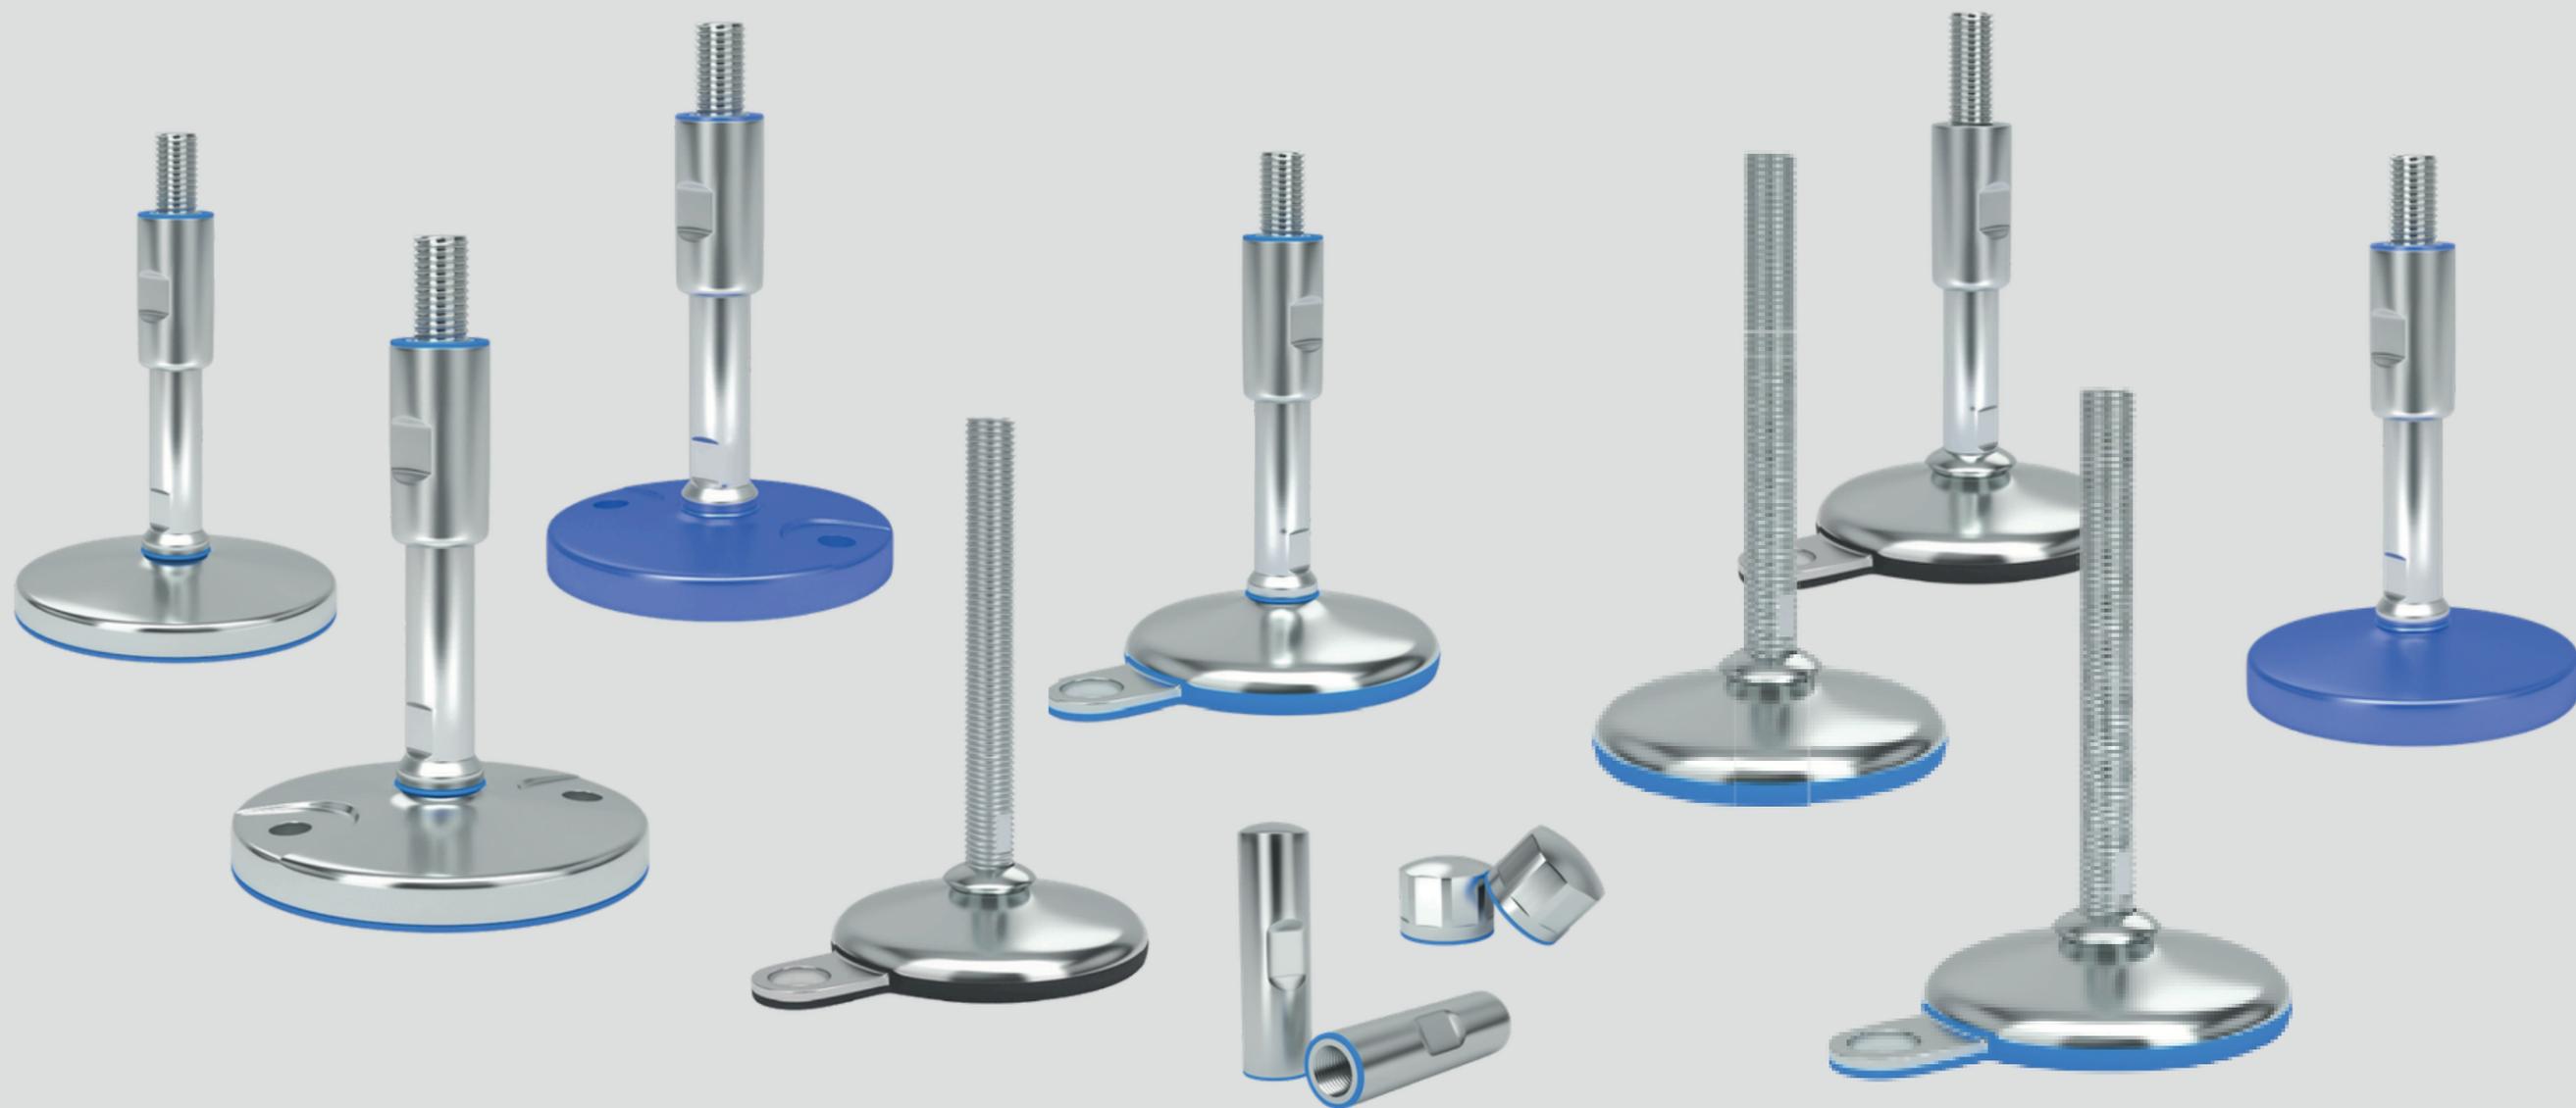

CLF stainless steel machine feet with full threaded spindle mounting

The hygienic levelling feet have a rounded and hygienic design which makes it easy to clean and suitable for demanding sanitary applications.

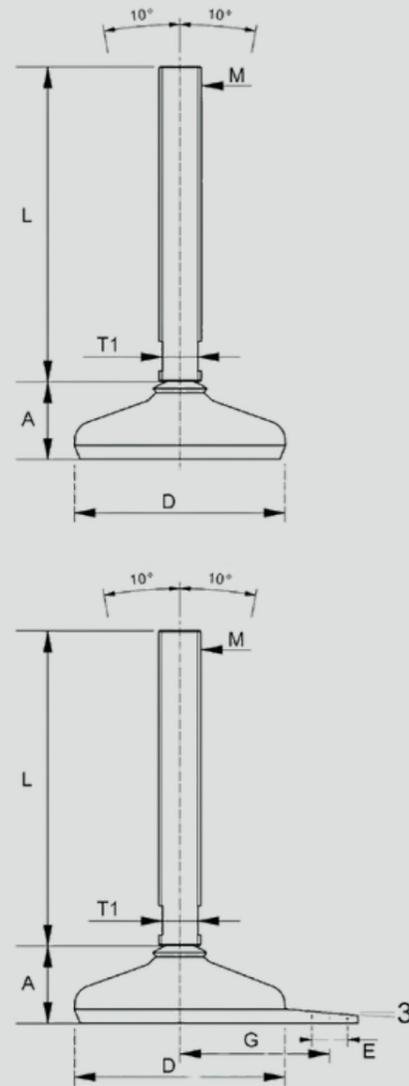

The stainless steel 1.4301 base plate are embedded with blue NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber with unique batch ID number for food safety traceability.

CLF stainless steel machine feet with full threaded spindle mounting



Orderingcode: CLF [Diam.base D] + HM [Thread M] x [L] - (B)
Example: CLF 80 + HM16x100 (B)

* **BLUE** - stock/preferred type **GREY** - On request



CLF blue base	CLF 50	CLF 60	CLF 80	CLF 100	CLF 120	CLF 140
Base Diameter D [mm]	50	60	80	100	120	140
Base Height A [mm]	25	25	28	32	36	36
Nom. Load [N]	7.000 N	7.000 N	15.000 N	20.000 N	30.000 N	50.000 N



CLFB blue base with 1 fixation	CLFB 60	CLFB 80	CLFB 100	CLFB 120
Base Diameter D Base [mm]	60	80	100	120
Height A [mm]	25	28	32	36
Lock hole distance G [mm]	45.5	55.5	68	81
Lock hole diameter E [mm]	15	15	19	19
Nom. Load [N]	7.000 N	15.000 N	20.000 N	30.000 N



HM A2-70 Spindle length (L): Type B - (Bayonet)

M12 : 70mm, 100mm, 120mm, 150 mm, 180 mm

M16 : 70mm, 100mm, 120mm, 150mm, 180mm, 200mm


M20 : 70 mm, 100 mm, 120mm, 150mm, 180mm, 200mm

M24 : 70 mm, 100 mm, 120 mm, 150mm, 180 mm, 200mm

M30 : 70 mm, 100 mm, 120 mm, 150mm, 180 mm, 200mm

HS stainless steel machine feet with full threaded spindle mounting

The hygienic machine feet have a rounded and hygienic design which makes it easy to clean and suitable for demanding sanitary applications.

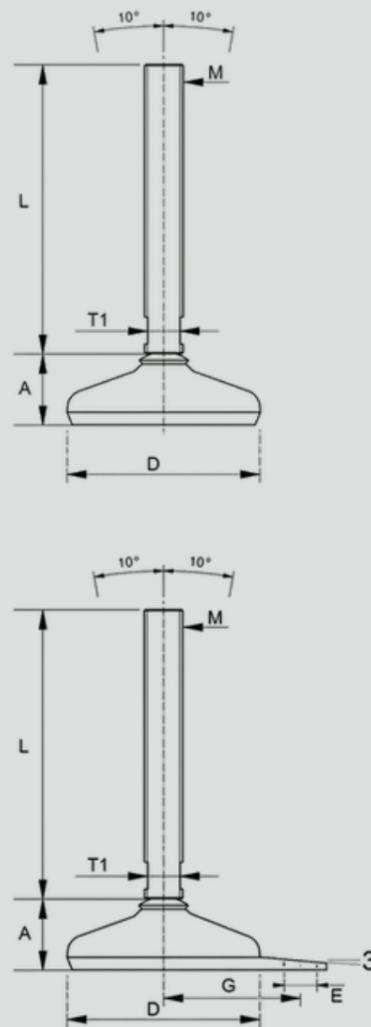

The stainless steel 1.4301 base plate is embedded with black NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber with unique batch ID number for food safety traceability.

HS stainless steel machine feet with full threaded spindle mounting



Ordering code: **HS(B) [Diam.base D] + H[Threads M]x[L] - (B)**
 Example : HS 80 + HM16x150 (B)

* **BLUE** - stock/preferred type

GREY - On request



HS black base	HS 50	HS 60	HS 80	HS 100	HS 120	HS 140
Base Diameter D [mm]	50	60	80	100	120	140
Base Height A [mm]	25	25	28	32	36	36
Nom. Load [N]	7.000 N	7.000 N	15.000 N	20.000 N	30.000 N	50.000 N



HSB black base with 1 fixation	HSB 60	HSB 80	HSB 100	HSB 120
Base Diameter D [mm]	60	80	100	120
Base Height A [mm]	25	28	32	36
Lock hole distance G [mm]	45.5	55.5	68	81
Lock hole diameter E [mm]	15	15	19	19
Nom. Load [N]	7.000 N	15.000 N	20.000 N	30.000 N



HM A2-70 Spindle length (L): Type B (Bayonet)

- M12** : 70mm, 100mm, 120mm, 150 mm
- M16** : 70mm, 100mm, 120mm, 150mm, 180mm, 200mm, 230 mm, 280 mm
- M20** : 120mm, 150mm, 180mm, 200mm, 230 mm, 280 mm, 330 mm
- M24** : 120 mm, 150mm, 180 mm, 200mm, 230 mm, 280 mm, 330 mm
- M30** : 180mm, 200mm, 230 mm, 280 mm, 330 mm



 **CALDIC** Techniek

Caldic Techniek B.V.
Schuttevaerweg 60 3044 BB
Rotterdam +31 (0)10 415 66 22
atverkoop@caldic-techniek.nl
www.caldic-techniek.nl